

# data sheet

**Colenta**<sup>®</sup>

# AERIAL FILM Processor 30 E6 26



**Colenta**<sup>®</sup>

E6 Processor options for sheet and roll film  
up to 30cm in width

09/2004 AN



# E6 AERIAL Film Processor

**TYPE: COLENTA AERIAL 30 E6 26**

**Technical Specifications:**

**Processing applications:** E6 film roll, sheet, aerial, 35mm .....

**Max. Process width:** max. 30 cm - 12 inch (4 Track loading of 35mm film)

**Microprocessor Control:** with 6 preprogrammable processing cycles

**Transport Speed: 30 E6 26 - 26cm/ 10 inch per minute (at 6 min Dev.Time)**

(Dev. times are pre-programmable for push-pull processing)

***Tank capacities:* AERIAL 30 E6 26**

<b>First Developer</b>	<b>:</b>	<b>22,0</b>
<b>Wash</b>	<b>:</b>	<b>10,0</b>
<b>Reversal</b>	<b>:</b>	<b>10,0</b>
<b>Color Developer</b>	<b>:</b>	<b>22,0</b>
<b>Conditioner</b>	<b>:</b>	<b>10,0</b>
<b>Bleach</b>	<b>:</b>	<b>22,0</b>
<b>Fix</b>	<b>:</b>	<b>17,0</b>
<b>Wash 2</b>	<b>:</b>	<b>17,0</b>
<b>STAB</b>	<b>:</b>	<b>10,0</b>

**Replenishment:** - **Precisely** controlled using opto-sensors to measure the film area loading.  
- Activated after a pre-programmed film area is fed into the processor  
- Antioxidation/standby replenishment, activated after 0-9 hours \*

**Solution Levels:** Low Level monitoring in all tanks \*  
High Level monitoring in Overflow/Collection Tanks (waste management, optional) \*  
Low Level in Repl. Tanks for FD, CD, Bleach and Fix (optional) \*

**Temperatures:** High / Low level monitoring for all the wet-tanks

**Work in Progress :** Details the location of film within the processor.


**Transport:** Drive motor overload monitoring  
Security cover lid switch

(\* optional) - when activated will operate an audible warning and a message alert to confirm the error type.

Technical specification subject to change without notice.

**Transport System:**

**COLENTA AERIAL 30 E6 26**

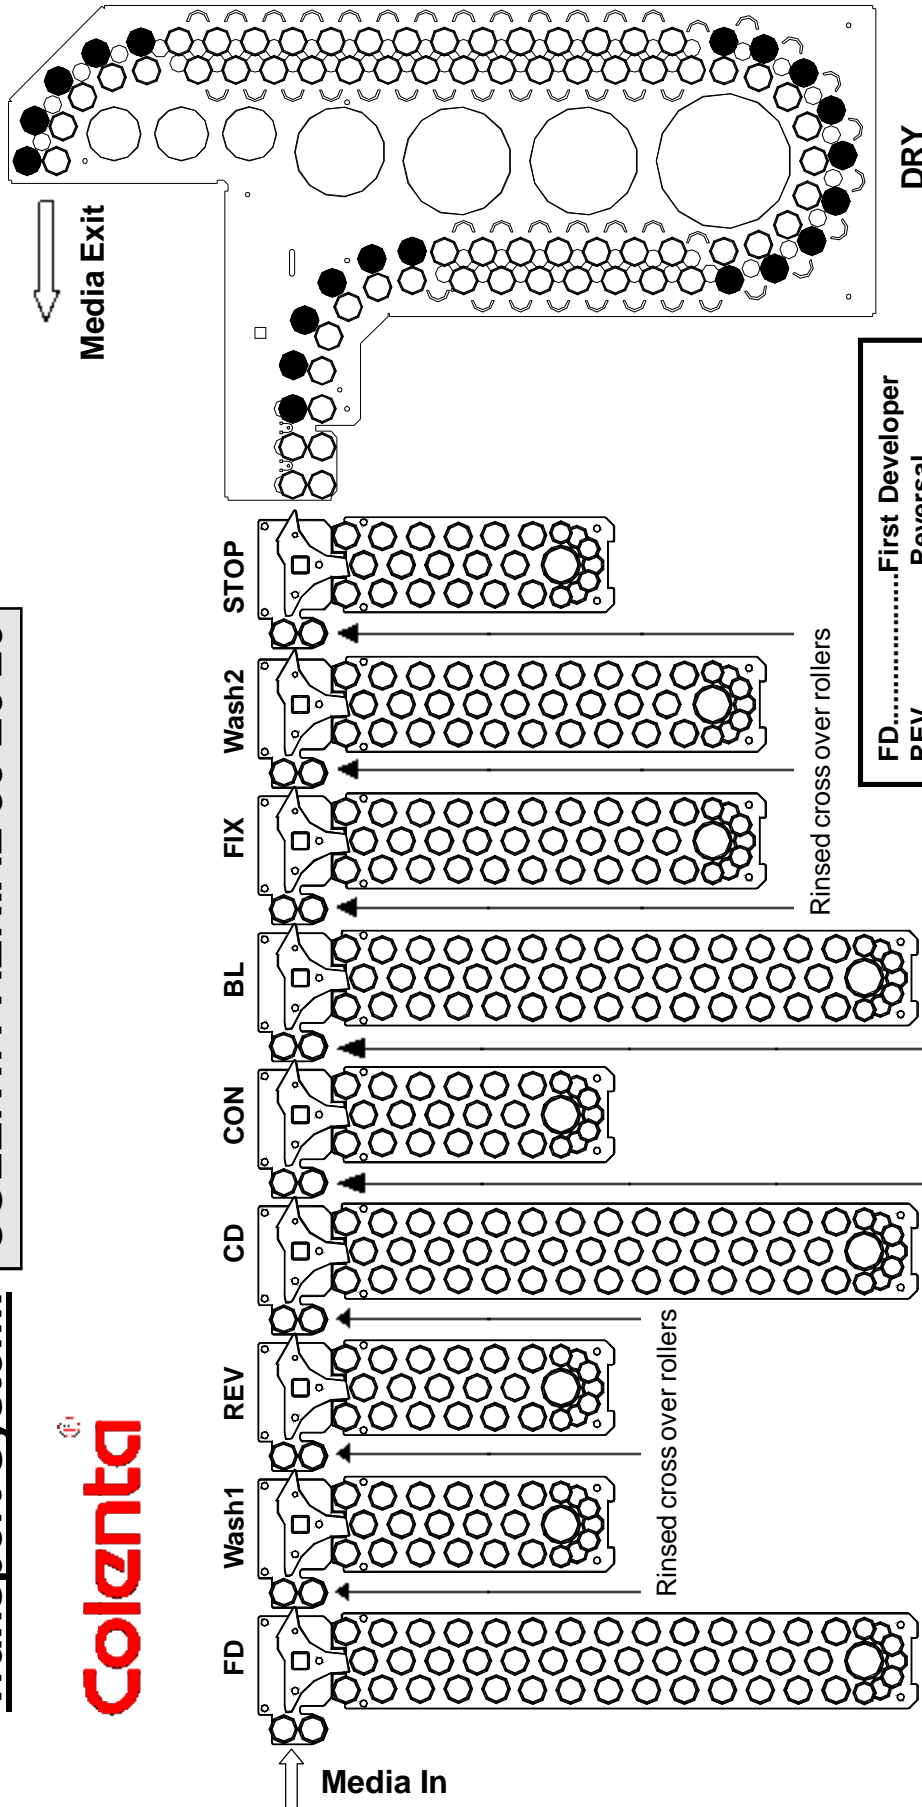

FD.....	First Developer
REV.....	Reversal
CD.....	Color Developer
CON.....	Conditioner
BL.....	Bleach
WASH.....	Washtank
FIX.....	Fixer
STOP.....	Stop

Media In

FD

Wash1

REV

CD

CON

BL

FIX

Wash2

STOP

Media Exit

DRY

Rinsed cross over rollers


Rinsed cross over rollers

Rinsed cross over rollers

Rinsed cross over rollers

# DIMENSIONS for:

**AERIAL 30 E6 26**

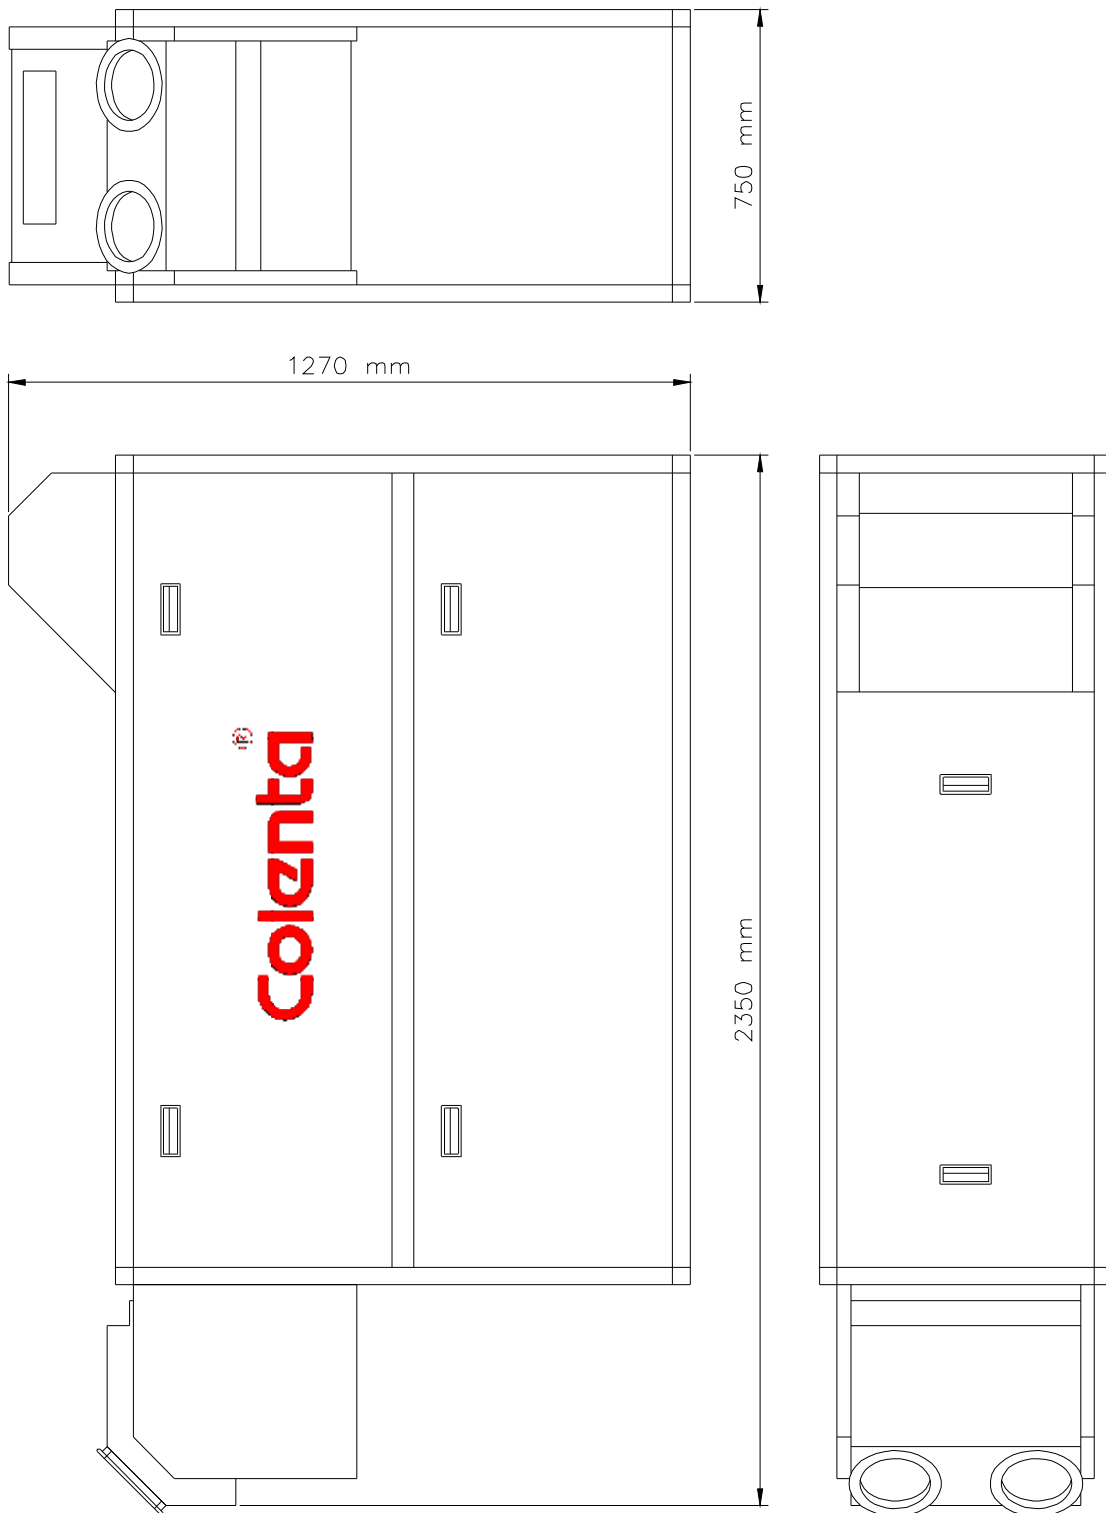


**We recommend a minimum walking space of 60cm around the processor.**

# Electrical supply: (Standard, when 3N~400/230V, 50/60 Hz supply available)

**AERIAL 30 E6 26**

**4,6 kW  
25 A**

ATTENTION:  
PROCESSOR TO BE CONNECTED TO  
SUPPLY NET: 3N~380/220V 50/60Hz

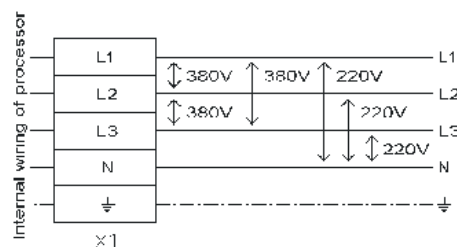

In case the above voltages are not available at site, please contact your local dealer or the factory for rewiring advice.

Alternatives, to be indicated when ordering

## Details for shipment:

**AERIAL 30 E6 26**

packing dimensions: 1 wooden box on palette  
243cm x 93cm x 150cm (L x W x H)  
packing volume: 3,39 m<sup>3</sup>  
weight with packing: 520 kg