

data sheet

Colenta[®]

AERIAL FILM

Processor 30 SW-N 6T



Colenta[®]

Black & White Processor options for sheet and roll film
up to 30cm in width

08/2009FR



B&W AERIAL Film Processor

TYPE: COLENTA AERIAL 30 SW-N 6T

Technical Specifications:

Processing applications: Black & White film

Max. Process width: max. 30 cm - 12 inch (4 Track loading of 35mm film)

Microprocessor Control: with 4 preprogrammable processing cycles

Transport Speed: AERIAL 30 SW-N 6T - variable speed (from 25 - 148 sec. DEV time)

(Dev. times are pre-programmable for push-pull processing)

Tank capacities: 30 SW-N 6T

Developer	:	13,0
FIX	:	16,5
FIX	:	16,5
Wash	:	16,5
Wash	:	16,5
STOP	:	7,5

Replenishment:

- Precisely controlled using opto-sensors to measure the film area loading.
- Activated after a pre-programmed film area is fed into the processor
- Antioxidation/standby replenishment, activated after 0-9 hours

Solution Levels:

- Low Level monitoring in all tanks
- High Level monitoring in Overflow Collection Tanks (waste management, optional) *
- Low Level in Repl. Tanks for Dev-, Fix and Stop (optional) *

Temperatures: High / Low level monitoring for all the wet-tanks

Work in Progress : Details the location of film within the processor.

Transport:


- Drive motor overload monitoring
- Security cover lid switch

(* optional) - when activated will operate an audible warning and a message alert to confirm the error type.

Technical specification subject to change without notice.





Transport System: COLENTA AERIAL 30 SW - N 6T

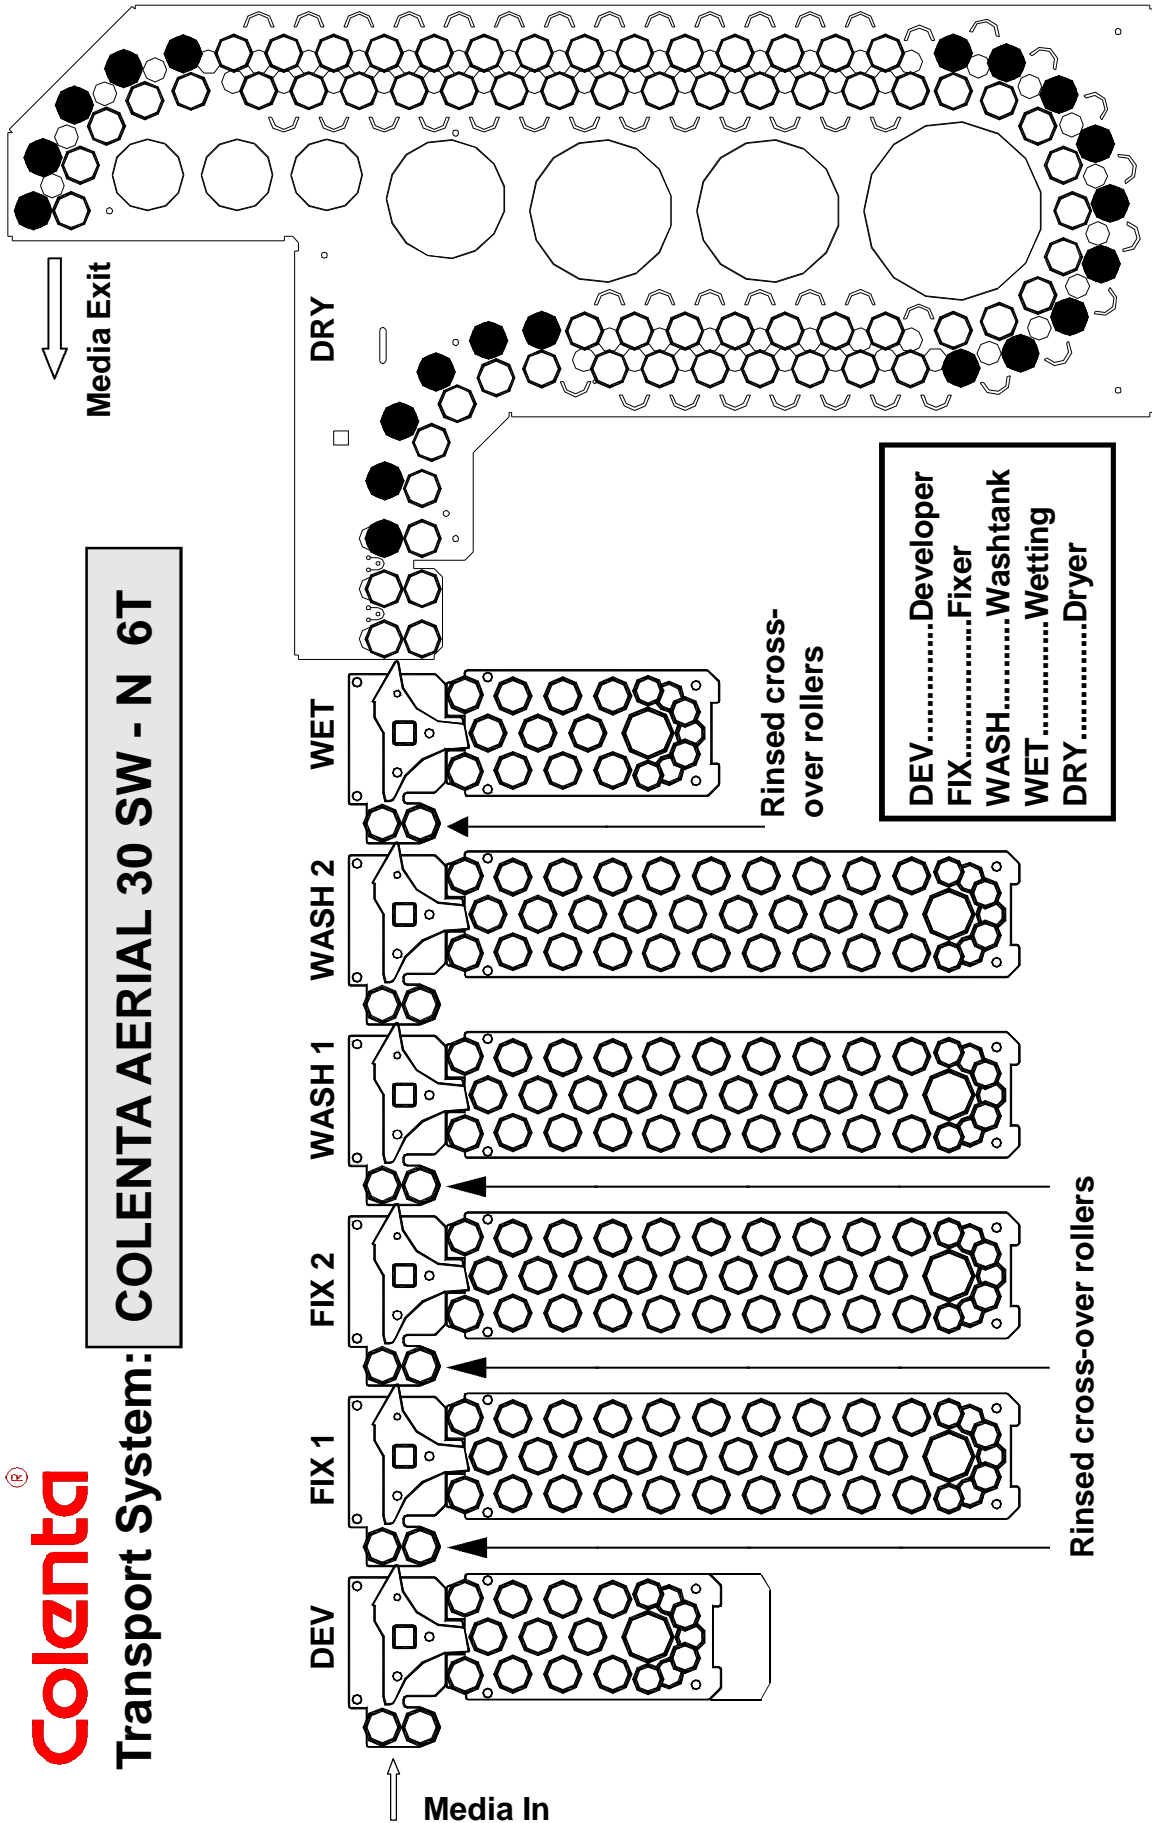

DIMENSIONS for:

AERIAL 30 SW-N 6T

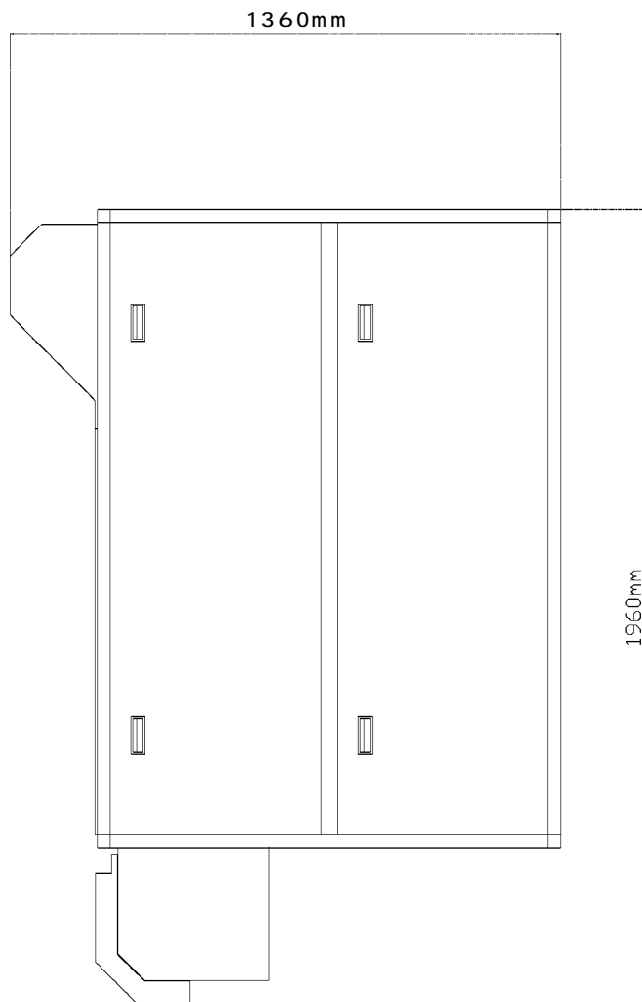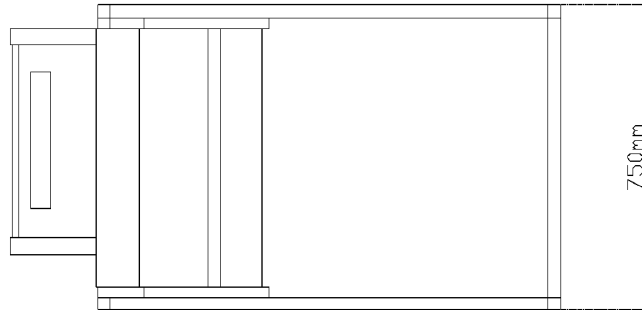

We recommend a minimum walking space of 60cm around the processor.


Electrical supply:

AERIAL 30 SW-N 6T

Colenta[®]

**Standard:
3N ~ 400/230V,
7,0 kW, 13 A**

**ATTENTION:
PROCESSOR TO BE CONNECTED TO
SUPPLY NET: 3N~380/220V 50/60Hz**

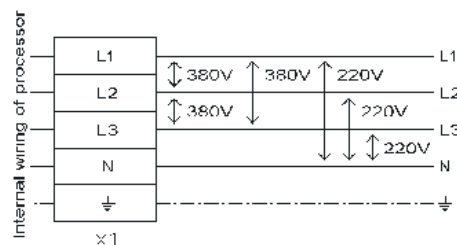

In case the above voltages are not available at site, please contact your local dealer or the factory for rewiring advice.

Alternatives, to be indicated when ordering:

3 ~230V, 7,0 kW, 20A

230 V~ , 7,0kW, 32A

Details for shipment:

AERIAL 30 SW-N 6T

packing dimensions: 2 wooden boxes on palettes

**Colli 1: 213cm x 92cm x 161cm (L x W x H)
packing volume: 3,155 m³
weight with packing: 440 kg**

**Colli 2 212cm x 67cm x 80cm (L x W x H)
packing volume: 0,601 m³
weight with packing: 83 kg**