

Colenta[®] Imageline Plate[®]

For Photopolymer CTP Printing Plates
IMAGELINE PLATE – TYPE ILP 68/85 FP
(Available in both Offline and Online options
for a wide range of Platesetters)



The **Colenta FP Processors** incorporates all the experience and features of Colenta's now well proven Plate Developing and handling technology to produce **Photopolymer CTP** printing plates (with or without PreHeat) to the highest standards.

Some details of the features of the COLENTA PlateProcessor design:

- * A Robust design with ease of operation.
- * A sophisticated Control software monitors and manages the varying range of production conditions in respect to replenishment requirements (including standby and sleepmode replenishment) ensuring a stable plate developer and consistent good quality production.



Standard Features and Accessories:

- Low Level monitoring for the DEV-tank
- Automatic Solution Tank „Top-Up“ control on „Start-Up“
- High level monitoring for DEVELOPER overflow collection tank
- Low Level monitoring for DEVELOPER replenishment tank
- Re-Wash Feed Facility
- „Safe Loading“ control
- „Work in Progress“ monitoring
- Sleep Mode for overnight and weekends
- Automatic cleaning cycle for the gum section before entering the sleepmode
- possibility to deactivate the PreHeat to run non-PreHeat plates


Optional:

- processor control software (Windows)
- floor trough
- different color design



A drawer unit within the main frame to house the replenishment and waste collection tanks. (waste management)

COLENTA ILP 68-85 FP/OL

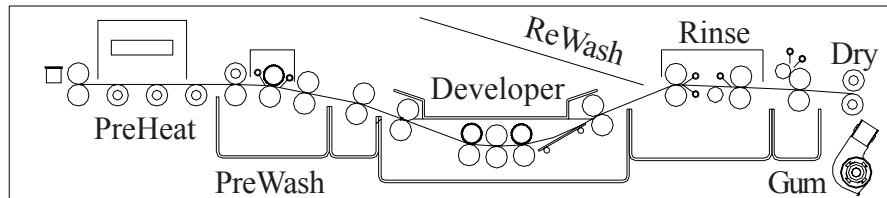

Technical Specifications:

Processing applications: Photopolymer Printing Plates
Plate width: max. 68 / 85 cm
Microprocessor Control: With 4 preprogrammable processing cycles and 1 overnight program (SLEEPMODE)
Transport Speed at 23 sec DEV-Time: 125cm/min - 49 inch/min

	Tankcapacity ILP 68 FP	Tankcapacity ILP 85 FP
PreWash :	Open system	Open system
Developer :	40 lt	48 lt
Wash :	Open system	Open system
Gum :	Closed system	Closed system


Electrical supply:	7,0 KW	8,1 KW
at 3N-400/230V	13 A	16 A
(alternatives are available on request)		

Weight:	Empty	350 kg	385 kg
	With solution	390 kg	425 kg

PRE-HEAT SWITCH



3 free programmable settings for 0.15 / 0.20 / and 0.30 Plates



Microprocessor controlled Display



Technical specification subject to change without notice.

see additional Data sheet: G4-25 / G4-26

COLENTA LABORTECHNIK
 Ges.m.b.H. & Co. KG
 Neunkirchner Strasse 117
 A-2700 Wiener Neustadt
 Tel.: +43-2622-28311-0
 Fax: +43-2622-28311-7
 E-mail: office@colenta.at

ACI-COLENTA
 INTERNATIONAL Div.
 Forge Close, Little End Rd,
 Eaton Socon, Cambs. UK
 Tel. +44-1480-211118
 Fax: +44-1480-215236
 Fax: +44/870/132 1352
 E-mail: aci@patflaherty.com