

# Colenta<sup>®</sup> Imageline Plate<sup>®</sup>

**For AGFA SilverLithoStar CTP - Printing Plates  
IMAGELINE PLATE - TYPE ILP 68 LS/OL  
for ECRM MAKO 2/4 Platesetter**



The Colenta Lithostar Processors are well proven and fully endorsed/accredited by Agfa as meeting their high standards in plate quality, reliability and production specifications. A copy of the Agfa accreditation is available on request.

**The Agfa accreditation details the following features of the Colenta Lithostar design:**


- \* Approved for 300 / 75 sq/mt plates per day
- \* A Robust design with ease of operation.
- \* Fully compatible and adaptable „on-site“ to Concept 7 Lithostar Plate when available.
- \* A sophisticated Control software monitors and manages the varying range of production conditions in respect to replenishment requirements (including standby and sleepmode replenishment) ensuring a stable plate developer and consistent good quality production.



#### Standard Features and accessories:

- In-built Chiller unit
- Prepared for Integrated Stacker (Online model)
- Low Level monitoring of Dev, Wash, Rinse and Finisher Tank solutions.
- Automatic Solution Tank „Top-Up“ control on „Start-Up“
- High level monitoring in overflow collection tank (waste management)
- Low Level Replenishment Tank monitoring.
- Re-Wash Feed Facility
- „Safe Loading“ control
- „Work in Progress“ monitoring
- Online interface

COLENTA ILP 68 LS / OL

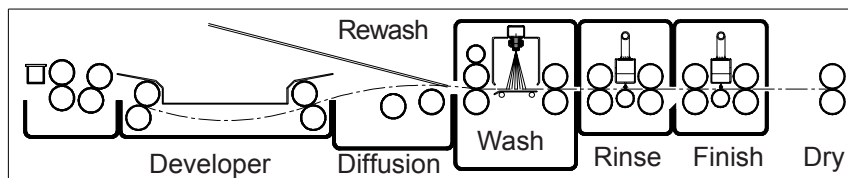

A drawer unit within the main frame to house the replenishment and waste collection tanks. (waste management)

#### Technical Specifications:

##### Processing applications:

Plate width:

Microprocessor Control:

##### Transport Speed at 20 sec DEV-Time:

(Time in Dev. plus Diffusion Time 20sec:)

AL-CTP AGFA SilverLithoStar

max. 68 cm

with 4 preprogrammable processing cycles and 1 overnight program (SLEEPMODE)

170cm/min - 67 inch/min

preprogrammable 16 to 80 sec.

(recommended by AGFA 35sec/100cm/min)

	Tankcapacity ILP 68	Temperature
Developer	12 lt	15 - 45°C
Wash	11 lt	18 - 55°C
Rinse	5 lt	18 - 55°C
Finisher	5,5 lt	18 - 55°C
Dryer	-	18 - 60°C
Electrical supply:	6KW	
at 3N-400/230V	13 A	

(possible alternatives are available on request)

Weight:	Empty	350 kg
	With solution	385 kg

**Colenta<sup>®</sup>**

see additional  
Data sheet:  
G4-11

Technical specification subject to change without notice.

COLENTA LABORTECHNIK  
Ges.m.b.H. & Co. KG  
Neunkirchner Strasse 117  
A-2700 Wiener Neustadt  
Tel.: +43-2622-28311-0  
Fax: +43-2622-28311-7  
E-mail: [office@colenta.at](mailto:office@colenta.at)  
<http://www.colenta.at>



Microprocessor controlled Display

ACI-COLENTA  
INTERNATIONAL Div.  
Forge Close, Little End Rd,  
Eaton Socon, Cambs. UK  
Tel. +44-1480-211118  
Fax: +44-1480-215236  
Fax: +44/870/132 1352  
E-mail: [aci@patflaherty.com](mailto:aci@patflaherty.com)