

# Colenta<sup>®</sup> Imageline Plate<sup>®</sup>

**For AGFA SilverLithoStar CTP - Printing Plates  
IMAGELINE PLATE - TYPE ILP 68 LS/OL  
for DAINIPPON SCREEN PF-R 3051VI - MICRA**



The Colenta Lithostar Processors are well proven and fully endorsed/accredited by Agfa as meeting their high standards in plate quality, reliability and production specifications. A copy of the Agfa accreditation is available on request.

**The Agfa accreditation details the following features of the Colenta Lithostar design:**

- \* Approved for 300 / 75 sq/mt plates per day
- \* A Robust design with ease of operation.
- \* Fully compatible and adaptable „on-site“ to Concept 7 Lithostar Plate when available.
- \* A sophisticated Control software monitors and manages the varying range of production conditions in respect to replenishment requirements (including standby and sleepmode replenishment) ensuring a stable plate developer and consistent good quality production.




**Standard Features and accessories:**

- In-built Chiller unit
- Prepared for Integrated Stacker (Online model)
- Low Level monitoring of Dev, Wash, Rinse and Finisher Tank solutions.
- Automatic Solution Tank „Top-Up“ control on „Start-Up“
- High level monitoring in overflow collection tank (waste management)
- Low Level Replenishment Tank monitoring.
- Re-Wash Feed Facility
- „Safe Loading“ control
- „Work in Progress“ monitoring
- Online Interface



COLENTA ILP 68 LS/OL for Dainippon Screen MICRA

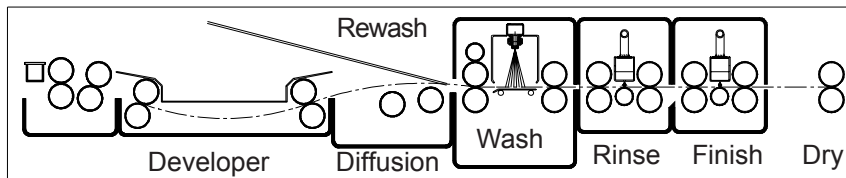

**Technical Specifications:**

**Processing applications:**

**Plate width:**

**Microprocessor Control:**

**Transport Speed at 20 sec DEV-Time:  
(Time in Dev. plus Diffusion Time 20sec:)**


AL-CTP AGFA SilverLithoStar  
max. 68 cm  
with 4 preprogrammable processing cycles  
and 1 overnight program (SLEEPMODE)  
170cm/min - 67 inch/min  
preprogrammable 16 to 80 sec.  
(recommended by AGFA 35sec/100cm/min)

A drawer unit within the main frame to house the replenishment and waste collection tanks.  
(waste management)

	Tankcapacity ILP 68	
<b>Developer</b> :	12 lt	
<b>Wash</b> :	11 lt	
<b>Rinse</b> :	5 lt	
<b>Finisher</b> :	5,5 lt	
<b>Dryer</b> :	-	
<b>Electrical supply:</b>	6KW	
<b>at 3N-400/230V</b>	13 A	

Temperature	
	15 - 45°C
	18 - 55°C
	18 - 55°C
	18 - 55°C
	18 - 60°C

Microprocessor controlled Display



(possible alternatives are available on request)

<b>Weight:</b>	Empty	350 kg
	With solution	385 kg



see additional  
Data sheet:  
G4-17

Technical specification subject to change without notice.

COLENTA LABORTECHNIK  
Ges.m.b.H. & Co. KG  
Neunkirchner Strasse 117  
A-2700 Wiener Neustadt  
Tel.: +43-2622-28311-0  
Fax: +43-2622-28311-7  
E-mail: [office@colenta.at](mailto:office@colenta.at)  
<http://www.colenta.at>

ACI-COLENTA  
INTERNATIONAL Div.  
Forge Close, Little End Rd,  
Eaton Socon, Cambs. UK  
Tel. +44-1480-211118  
Fax: +44-1480-215236  
Fax: +44/870/132 1352  
E-mail: [aci@patflaherty.com](mailto:aci@patflaherty.com)